

Hydroraft & VRS Hydroraft

Drainage & VRS Integration

INNOVATION
AND
Performance you can depend on



- Hydroraft can be supplied with the ability to incorporate VRS systems or as a load bearing drainage system installed without VRS.
- Hydrorock is reliable and maintenance friendly system with a life span of up to 70 years.
- As the Hydrorock block is wrapped in a geotextile, root infiltration is not a problem, root growth does not have a negative effect on the operation of the system.
- Removes Pollutants from road runoff: 80% of Suspended Solids; 70%
 Oil & PAHs; 80% Copper; 51% Zinc, and facilitates removal of dissolved metals / solids / fertilisers / nitrates
- End of Life- Product fully recyclable
- Hydrorock maintains the natural water cycle
- Easy to inspect & clean
- A combined system for VRS & drainage installations.









The challenge- Drainage in highways

Deliverability (project risk)

- Problem- 95% of drainage projects go off plan when ground is opened.
- <u>Challenge-</u> Ensuring projects are completed on time & within budget
- Solution- Hydroraft provides total flexibility during configuration & installation

Maintainability

- Problem- Conventional filter stone requires costly maintenance
- <u>Challenge-</u> Minimising & simplifying maintenance
- Solution- Hydroraft systems are designed to minimise maintenance by reducing inspection, removing the need for periodical remediation, repairs, or replacement.



Reliability

- <u>Problem</u>- Conventional drainage does not always perform as required
- <u>Challenge</u>- Providing a drainage solution that works all the time.
- Solution- Hydroraft systems are designed for whole life cost, they are high porosity, permeable & non clogging
- Image below shows Hydrorock installed under Amsterdam transport infrastructure.





Work Smarter Not Harder with Smartraft® What is Hydroraft?

- Hydroraft is a combination of the proven modular highways foundation- Smartraft® integrating a product called "Hydrorock" to provide improved drainage systems on our highways.
- Hydroraft can be supplied with the ability to incorporate VRS systems & as a load bearing drainage system installed without VRS.
- Hydrorock is manufactured from a natural material "Basalt" and is made by an international company Rockwool.







Work Smarter Not Harder with Smartraft® Durability with Hydroraft Hydrorock

- Hydrorock is a reliable and maintenance friendly system with a life span of up to 70 years.
- The inherent properties of the product do not deteriorate over time, even under the influence of oxygen, heat, frost, sunlight & the effects of chemical substances such as acids, alkali, oils and fats.
- There are no issues with compression & settlement, even under heavy loads (20t axle loads). This makes it ideal for beneath roads, buildings, tramlines or carparks.
- Approx 1% consolidation occurs during installation, with less than 2% deformation over 30 years. Making the product stable in shape & size throughout its entire life span.
- Root infiltration is not a problem, root growth does not have a negative effect on the operation of the system.
- Easy to inspect & clean. After some time, sediment such as silt, sand or organic material can collect in the silt tray. By carrying out periodic inspections and cleaning the silt tray will ensure optimum condition.





Environmental Performance

Hydrorock maintains the natural water cycle

Current drainage practice often breaks Natural Water Cycles by:

- Increasing urban flooding.
- •Overpowering sewers and water treatment facilities.
- •Damaging the natural ecology of the soil.
- •Polluting rivers with toxic chemicals.
- •Burying unnecessary plastic in the ground.

Hydrorock natural aquifer solutions

- Use natural materials.
- •Work with rainfall where it lands.
- ·Manage surface water fully onsite.
- •Enable ultra efficient natural infiltration.
- •Create natural-type aguifers wherever they are needed
- •Removes Pollutants from road runoff: 80% of Suspended Solids; 70% Oil & PAHs; 80% Copper; 51% Zinc, and facilitates removal of dissolved metals / solids / fertilisers / nitrates

When built into water control infrastructure,

 Hydrorock safely stores incredible quantities of excess rainwater, before releasing it back to nature

Safe for the soil

 The material is inert, does not degrade and has an expected life span of up to 70years.

End of Life

· Product fully recyclable






Work Smarter Not Harder with Smartraft® Drainage Performance

Drainage performance of Hydroraft + Hydrorock (Infill & Base layer)

1 in 30-year rain event totaling 50mm/m2 from a 2-lane carriage way within 1 hour

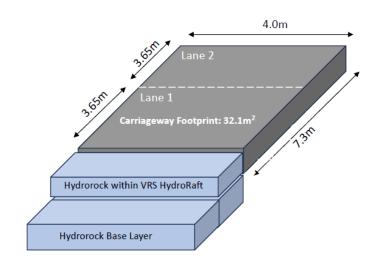

- Total Stormwater Volume to be buffered: 1,606L / 4.0 linear metres $29.2m^2$ @ 55mm / m^2 = 401L ($0.4m^3$) / linear metre of System
- Absorption Capability: >8,000L / hr / 4.0 linear metres
- Silt Basket Storage Capacity: 75L / 4.0 linear metres
- Hydrorock Storage Capacity: 1,553 / 4.0 linear metres


Total System Storage Capacity: 1,628L / 4.0 linear metres 407L (0.5m³) / linear metre of System

^{*} Water entering the system (per hour) in excess of the HydroRaft system storage capacity will freely percolate down into the gravel layer beneath – if the gravel layer cannot receive all the water, the excess will leave system via overflow pipe



Section View of VRS Smartraft + Hydrorock (Infill & Base Layer)

Capacity of water/ 6m length= 2270 litres

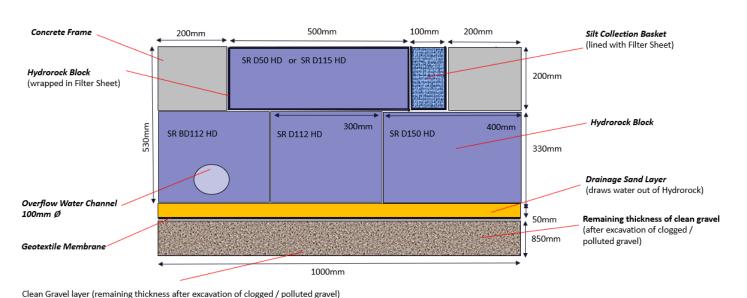






Layout configurations- Without VRS

Top Layer

Silt Collection Baskets
(Lined with Filter Sheet)
@ 100% void = Total 75L Storage

Hydrorock Blocks HR D25 HD
(Wrapped In Filter Sheet)
@ 95% void = Total 138L Storage

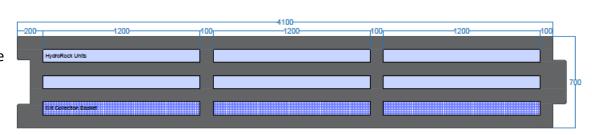

Base Layer

Hydrorock Blocks HR BD150 HD
@ 95% void = Total 510L Storage

Hydrorock Blocks HR D112 HD
@ 95% void = Total 396L Storage


HR D150 HD	HR D150 HD	HR D150 HD	HR D60 HD
HR BD112 HD	HR BD112 HD	HR BD112 HD	HR D60 HD






Section View of HydroRaft + Hydrorock (Infill & Extended Base Layer)

Capacity of water/ 6m length= 2120 litres

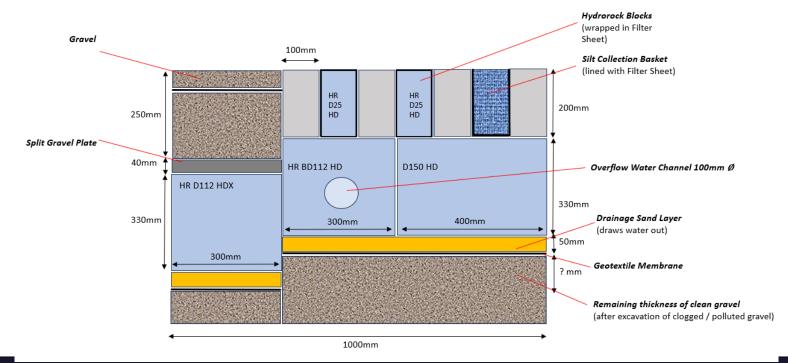



700mm HydroRaft With Double Extended Base

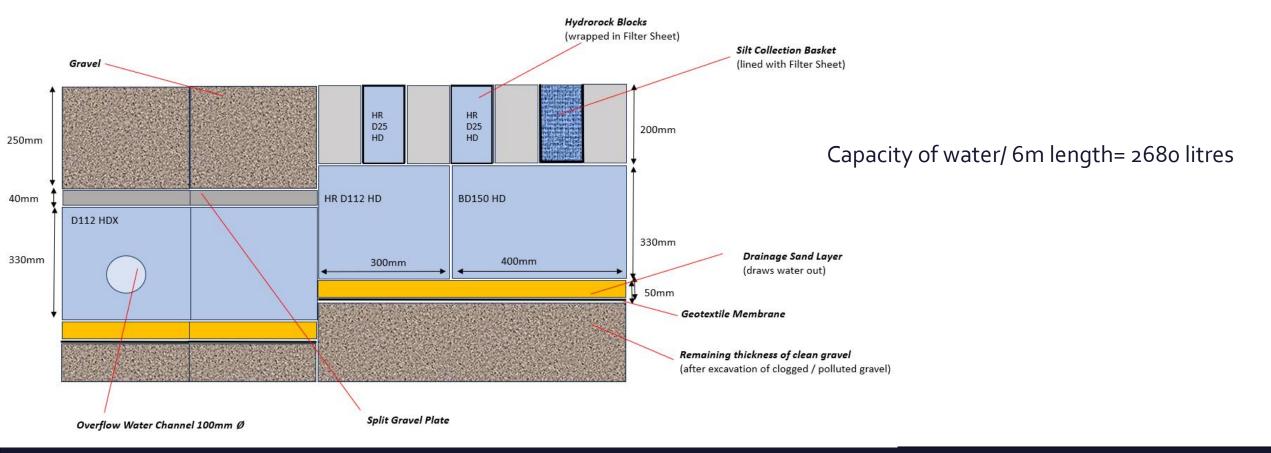



- Hydroraft can be supplied with the ability to incorporate VRS systems or as a load bearing drainage system installed without VRS.
- Hydrorock is reliable and maintenance friendly system with a life span of up to 70 years.
- As the Hydrorock block is wrapped in a geotextile, root infiltration is not a problem, root growth does not have a negative effect on the operation of the system.
- Removes Pollutants from road runoff: 80% of Suspended Solids; 70%
 Oil & PAHs; 80% Copper; 51% Zinc, and facilitates removal of dissolved metals / solids / fertilisers / nitrates
- End of Life- Product fully recyclable
- Hydrorock maintains the natural water cycle
- Easy to inspect & clean
- A combined system for VRS & drainage installations.









INNOVATION

AND

Performance you can depend on

• If you would like to understand how Smartraft® can help you on your next project, or have any questions please do not hesitate to contact-

<u>Kevindavies@smartraft.co.uk</u> for further details